


### >> Interactive Multifunctional Display



# >> Optional auto water-filling battery (Optional)



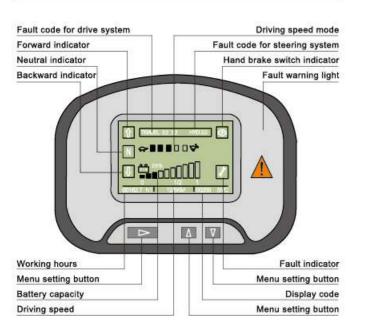



 Energy regeneration with AC technology control for the energy-saving, the single shift working time of the battery is increased by 15%



Reliable multifunctional display showing working condition, fault detection information for more direct and convenient reading.


Item			unit G series 1-5t AC Electric Platform Truck					
1 T	ruck Mo	idel		BD10-JB1	BD20-JA1	BD20-JB1	BD40-JA1	BD50-JA1
2 C	perating	g mode				Seated		
3 Capacity		t	1	2	2	4	5	
4 Wheelbase		mm	1150	1650	1650	1810	2100	
5 Weight		kg	880	1500	1500	2200	2400	
6 fr	front-rear tires load without load		kg	440/440	800/700	800/700	1000/1200	1150/1250
7		Туре				Pneumatic tires		
8 T	īres	Front tire		5.00-8	6.50-10	6.50-10	7.00-12	7.00-12
9		Rear tire		5.00-8	6.50-10	6.50-10	7.00-12	7.00-12
0 S	eat heig	ht(front ground)	mm	735	860	860	980	980
1 Traction base height		mm	450 (Optional)	580 (Optional)	580 (Optional)	720(Optional)	720(Optional)	
12 Truck dimension(length*width*height)		mm	2750×1000×1250	3615×1400×1400	3615×1400×1400	3970×1500×1400	4575×1500×155	
13 Platform dimension(length*width*height)		mm	1400×1000×560	2240×1400×680	2240×1400×680	2600×1500×850	3200×1500×850	
14 Min. Ground clearance		mm	80	130	130	130	130	
15 Turning radius		mm	3000	3500	4300	4400	4800	
16 Driving speed(with/without load)		km/h	8.0/10.0	12.0/16.0	12.0/16.0	12.0/16.0	12.0/15.0	
17 Gradeability(with load)		%xm	10%x20m	10%x20m	10%x20m	10%x20m	8%x20m	
8 D	riving b	rake			Hydra	ulic brake and electric t	orake	
9 P	arking t	orake		Mechanic				
20 D	riving m	node				Rear drive		
21 D	rive mo	tor rated power	kW	3	4	4	6	6
22 S	teering	motor rated power	kW	1	1.35	1	1.35	1.35
23 B	attery/ra	ated capacity(5H)	V/Ah	24/280	48/280	48/280	48/350	48/450
24 B	attery w	eight	kg	300	550	550	579	715
5 Tread, front tire		mm	790	1160		1250		
6 Tread, rear tire		mm	820	820 1160		125	0	
27 Driving control mode			Electronic stepless mode					
28 Operator's ear noise		db(A)	<65					
9 C	Controller type				CURTIS AC controller			

Standard configuration	Optional configuration		
Streamlined glass fiber cover Took kits	Cabin	Different height traction pin	
Battery	Platform guard bar	Solid tire	
Liquid crystal combination display	Beacon	Simple rain cover	
Pneumatic tires	Crate	Optional paint color	
Traction pin	Optional dimension platform		

#### ANHUI HELI CO., LTD.

ADD: NO.668 Fang Xing Street, Economic And Development Zone, Anhui P.R.China TEL: (0086) 551-63689667,63689674,63689676 FAX: (0086) 551-63689558-247 (0086) 551-63689674 E-MAIL: helizzj@helichina.com WEBSITE: www.helichina.com

© 2013 heli copyright Catalog No.2013-07-C HELI Print

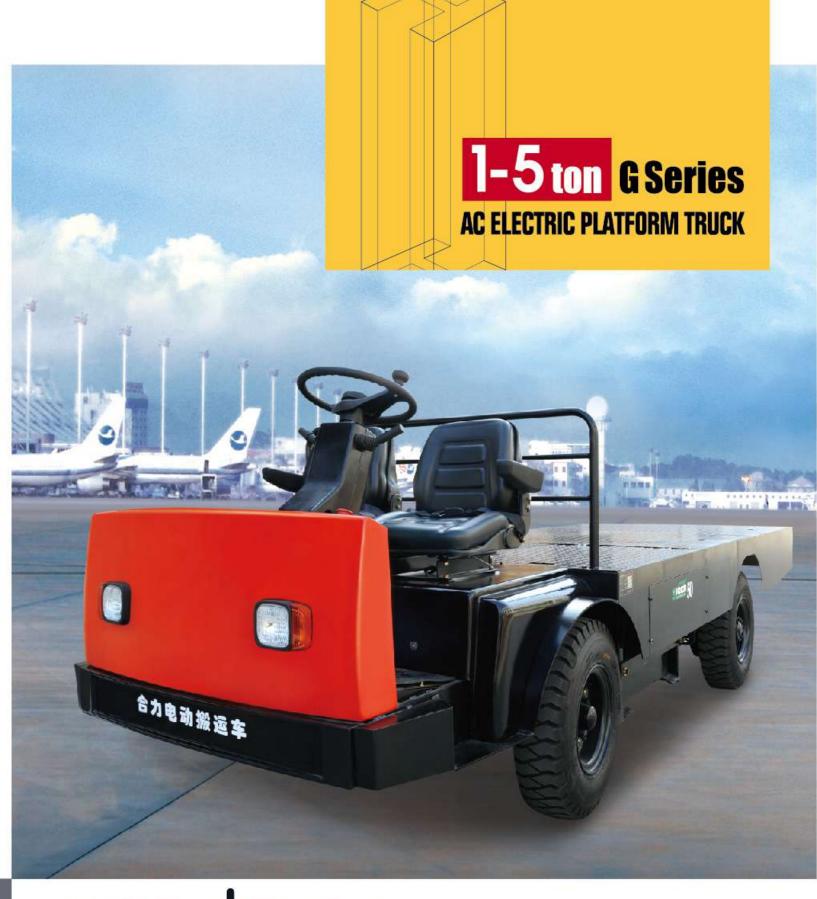









# >> Brief Introduction

As the newly designed environmentally friendly tractor machines, HELI G series 1-5T AC Electric Platform Truck has the unique profiling, ergonomically and aesthetic philosophy combination for operator comfort and ease of use, maintenance convenience.

This machine is powered by battery, with World-famous Curtis AC controller matched AC motors to supply the stepless accelerating, high efficiency, reliable quality, comfortable operation, and strong power.



### Drive system

- Special drive axle for electric machines with low noise, non-pollution, stable running, perfect sealing, and also with enough ground clearance for good trafficability.
- Large gear ratio, powerful traction, strong gradeability, perfect performance, suitable for complex operating condition.

### Steering system

- With fully-hydraulic Transverse cylinder power steering or circulating ball type redirector, easily steering, and long working life.
- Front and rear suspension are with elastic connection for more comfort.





# Superior intelligent design

· Intelligent components and function for the better safety to driver and machines, also supply the higher working efficiency, and reduce the energy-consumption.



### Operating system

- Comfortable brake/accelerating pedal position with light stepping strength, fully meeting ergonomically
- demands.
- With front-rear adjustable steering wheel to satisfy different height drivers. With excellent cold-brake efficiency, enough brake force, fully meet the parking and driving brake standard.

### Chassis system

• Side-extraction battery replace, very convenient and reliable.







